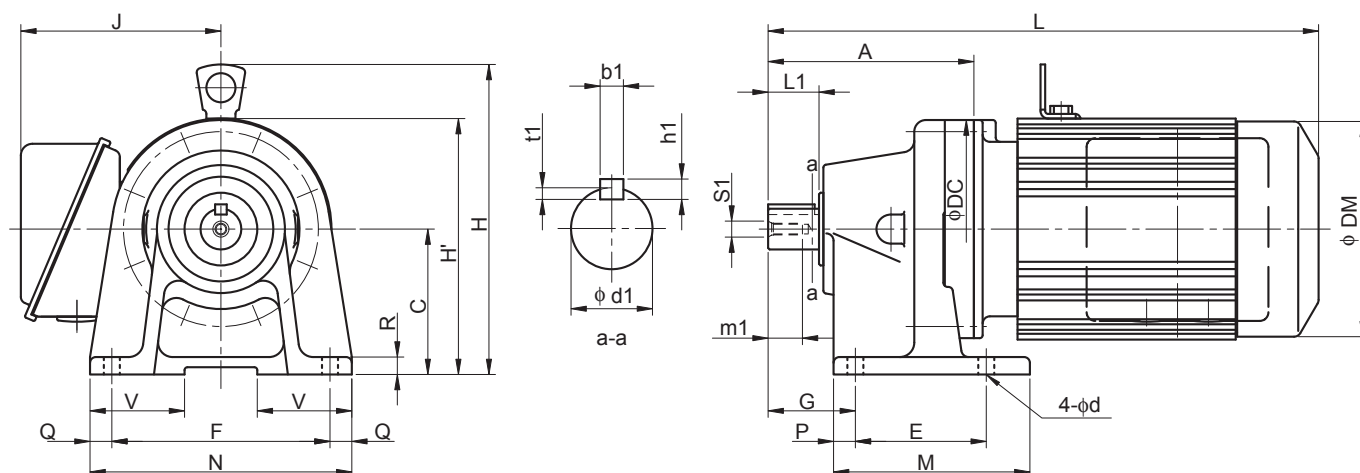


Dimension Tables Gearmotors (Universal Direction, Foot-Mount)

CNHM^{Note 1} - 606□ to 609□

Frame size Note 4	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 6						
														d1	L1	b1	h1	t1	S1	m1
606□	92	80	110	60	120	41	84	144	12	12	10	35	9	14	25	5	5	3	M5	16
607□	98	80	110	60	120	47	84	144	12	12	10	35	9	18	30	6	6	3.5	M6	16
608□	129	90	134	75	120	52	99	144	12	12	13	37	9	22	35	6	6	3.5	M6	16
609□	142	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20

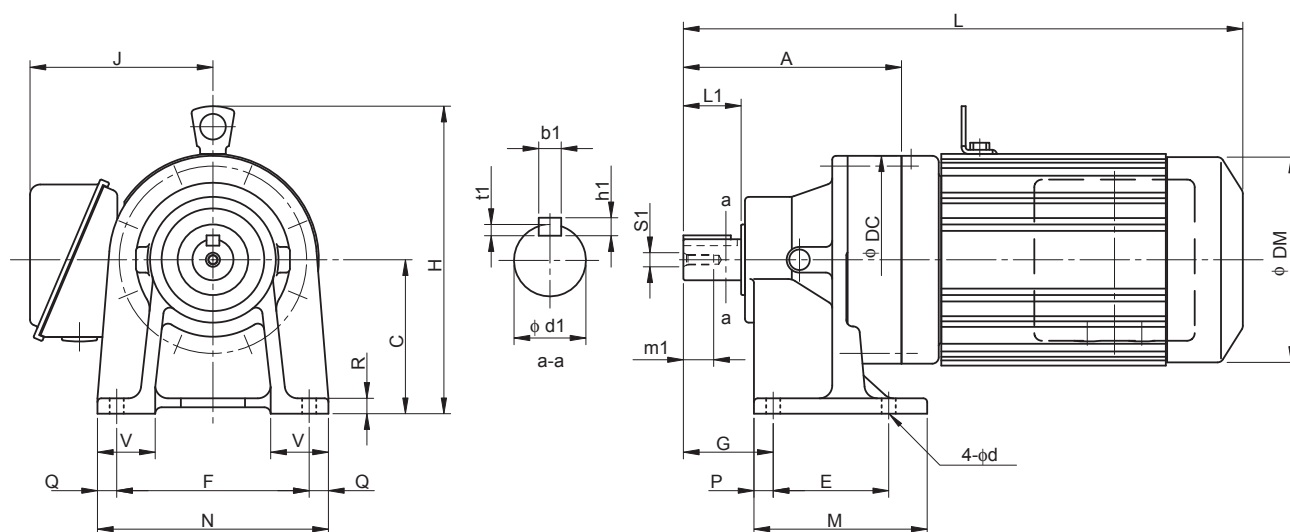
Model Note 4, 5	Motor		Standard							With Brake						
	kW	P	L	H	H'	J	DM	W(kg)		L	H	H'	J	DM	W(kg)	
CNHM01 - 606□ - (B) - Ratio	0.1	4	254	-	140	130	119	7		261	-	138	130	124	8	
CNHM02 - 606□ - (B) - Ratio	0.2	4	272	-	138	130	124	8		300	-	138	130	124	9	
CNHM03 - 606□ - (B) - Ratio	0.25	4	272	-	138	130	124	8		300	-	138	130	124	9	
CNHM01 - 607□ - (B) - Ratio	0.1	4	260	-	140	130	119	7		267	-	138	130	124	8	
CNHM02 - 607□ - (B) - Ratio	0.2	4	278	-	138	130	124	8		306	-	138	130	124	9	
CNHM03 - 607□ - (B) - Ratio	0.25	4	278	-	138	130	124	8		306	-	138	130	124	9	
CNHM05 - 607□ - (B) - Ratio	0.4	4	294	-	138	130	124	9		326	-	138	130	124	10	
CNHM01 - 608□ - (B) - Ratio	0.1	4	286	-	157	130	119	10		293	-	157	130	124	11	
CNHM02 - 608□ - (B) - Ratio	0.2	4	304	-	157	130	124	11		332	-	157	130	124	12	
CNHM03 - 608□ - (B) - Ratio	0.25	4	304	-	157	130	124	11		332	-	157	130	124	12	
CNHM05 - 608□ - (B) - Ratio	0.4	4	320	-	157	130	124	13		352	-	157	130	124	14	
CNHM08 - 608□ - (B) - Ratio	0.55	4	361	203	-	140	148	17		404	203	-	140	148	18	
CNHM1 - 608□ - (B) - Ratio	0.75	4	361	203	-	140	148	17		404	203	-	140	148	18	
CNHM01 - 609□ - (B) - Ratio	0.1	4	304	-	175	130	119	12		311	-	175	130	124	14	
CNHM02 - 609□ - (B) - Ratio	0.2	4	322	-	175	130	124	13		350	-	175	130	124	15	
CNHM03 - 609□ - (B) - Ratio	0.25	4	322	-	175	130	124	13		350	-	175	130	124	15	
CNHM05 - 609□ - (B) - Ratio	0.4	4	338	-	175	130	124	14		370	-	175	130	124	16	
CNHM08 - 609□ - (B) - Ratio	0.55	4	379	213	-	140	148	18		422	213	-	140	148	21	
CNHM1 - 609□ - (B) - Ratio	0.75	4	379	213	-	140	148	18		422	213	-	140	148	21	
CNHM1H - 609□ - (B) - Ratio	1.1	4	412	220	-	145	160	21		474	220	-	145	160	26	
CNHM2 - 609□ - (B) - Ratio	1.5	4	412	220	-	145	160	21		474	220	-	145	160	26	

Note: 1. □ indicates motor capacity.

2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."

3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Universal Direction, Foot-Mount)

CNHM^{Note 1} - 610□ to 612□

GEARMOTORS

Dimension Tables
CNHM

Frame size Note 4	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 6						
														d1	L1	b1	h1	t1	S1	m1
610□	156	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
611□	170	120	162	90	150	70	135	180	15	15	12	45	11	32	45	10	8	5	M8	20
612□	186	120	204	115	190	82	155	230	20	20	15	55	14	38	55	10	8	5	M8	20

Model Note 4, 5	Motor		Standard						With Brake					
	kW	P	L	H	J	DM	W(kg)		L	H	J	DM	W(kg)	
CNHM02 - 610□ - (B) - Ratio	0.2	4	336	207	130	124	18		364	207	130	124	20	
CNHM03 - 610□ - (B) - Ratio	0.25	4	336	207	130	124	18		364	207	130	124	20	
CNHM05 - 610□ - (B) - Ratio	0.4	4	352	207	130	124	19		384	207	130	124	21	
CNHM08 - 610□ - (B) - Ratio	0.55	4	393	213	140	148	23		436	213	140	148	26	
CNHM1 - 610□ - (B) - Ratio	0.75	4	393	213	140	148	23		436	213	140	148	26	
CNHM1H - 610□ - (B) - Ratio	1.1	4	426	220	145	160	27		488	220	145	160	32	
CNHM2 - 610□ - (B) - Ratio	1.5	4	426	220	145	160	27		488	220	145	160	32	
CNHM3 - 610□ - (B) - Ratio	2.2	4	446	226	152	173	31		509	226	152	173	37	
CNHM05 - 611□ - (B) - Ratio	0.4	4	363	236	130	124	20		394	236	130	124	21	
CNHM08 - 611□ - (B) - Ratio	0.55	4	403	236	140	148	23		452	236	140	148	26	
CNHM1 - 611□ - (B) - Ratio	0.75	4	403	236	140	148	23		452	236	140	148	26	
CNHM1H - 611□ - (B) - Ratio	1.1	4	436	240	145	160	26		493	240	145	160	31	
CNHM2 - 611□ - (B) - Ratio	1.5	4	436	240	145	160	26		493	240	145	160	31	
CNHM3 - 611□ - (B) - Ratio	2.2	4	456	246	152	173	30		519	246	152	173	36	
CNHM4 - 611□ - (B) - Ratio	3.0	4	491	266	168	212	40		563	266	168	212	50	
CNHM5 - 611□ - (B) - Ratio	3.7	4	491	266	168	212	40		563	266	168	212	50	
CNHM05 - 612□ - (B) - Ratio	0.4	4	387	257	130	124	30		419	257	130	124	32	
CNHM08 - 612□ - (B) - Ratio	0.55	4	423	233	140	148	32		466	233	140	148	35	
CNHM1 - 612□ - (B) - Ratio	0.75	4	423	233	140	148	32		466	233	140	148	35	
CNHM1H - 612□ - (B) - Ratio	1.1	4	456	240	145	160	36		518	240	145	160	41	
CNHM2 - 612□ - (B) - Ratio	1.5	4	456	240	145	160	36		518	240	145	160	41	
CNHM3 - 612□ - (B) - Ratio	2.2	4	476	246	152	173	40		539	246	152	173	47	
CNHM4 - 612□ - (B) - Ratio	3.0	4	499	266	168	212	50		571	266	168	212	60	
CNHM5 - 612□ - (B) - Ratio	3.7	4	499	266	168	212	50		571	266	168	212	60	
CNHM8 - 612□ - (B) - Ratio	5.5	4	543	266	168	212	57		615	266	168	212	67	

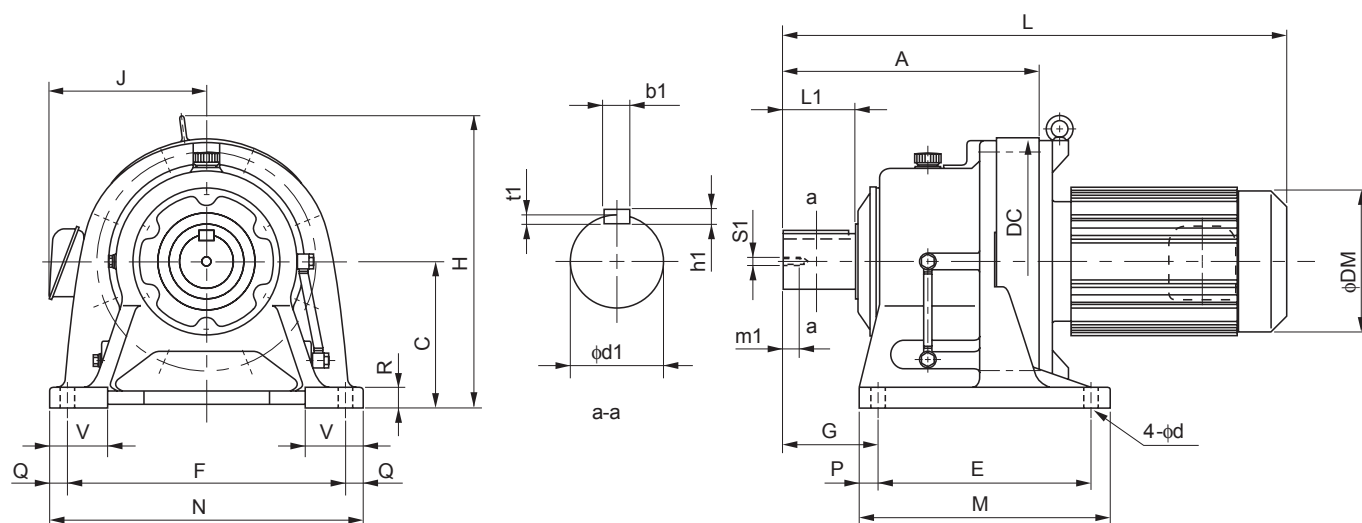
Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the frame size indicates models equipped with brake.

6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 613□ to 614□

Frame size Note 4	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 6						
														d1	L1	b1	h1	t1	S1	m1
613□	240	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
614□	260	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18

Model Note 4, 5	Motor		Standard						With Brake				
	kW	P	L	H	J	DM	W(kg)		L	H	J	DM	W(kg)
CHHM08 - 613□ - (B) - Ratio	0.55	4	477	265	140	148	51		520	265	140	148	54
CHHM1 - 613□ - (B) - Ratio	0.75	4	477	265	140	148	51		520	265	140	148	54
CHHM1H - 613□ - (B) - Ratio	1.1	4	510	268	145	160	55		572	268	145	160	60
CHHM2 - 613□ - (B) - Ratio	1.5	4	510	268	145	160	55		572	268	145	160	60
CHHM3 - 613□ - (B) - Ratio	2.2	4	530	274	152	173	58		593	274	152	173	65
CHHM4 - 613□ - (B) - Ratio	3.0	4	553	296	168	212	68		625	296	168	212	78
CHHM5 - 613□ - (B) - Ratio	3.7	4	553	296	168	212	68		625	296	168	212	78
CHHM8 - 613□ - (B) - Ratio	5.5	4	597	296	168	212	75		669	296	168	212	85
CHHM10 - 613□ - (B) - Ratio	7.5	4	620	323	213	251	90		715	323	213	251	108
CHHM15 - 613□ - (B) - Ratio	11	4	680	323	213	251	104		775	323	213	251	121
CHHM1 - 614□ - (B) - Ratio	0.75	4	497	268	140	148	52		540	268	140	148	55
CHHM1H - 614□ - (B) - Ratio	1.1	4	530	268	145	160	56		592	268	145	160	61
CHHM2 - 614□ - (B) - Ratio	1.5	4	530	268	145	160	56		592	268	145	160	61
CHHM3 - 614□ - (B) - Ratio	2.2	4	550	274	152	173	59		613	274	152	173	66
CHHM4 - 614□ - (B) - Ratio	3.0	4	573	296	168	212	69		645	296	168	212	79
CHHM5 - 614□ - (B) - Ratio	3.7	4	573	296	168	212	69		645	296	168	212	79
CHHM8 - 614□ - (B) - Ratio	5.5	4	617	296	168	212	76		689	296	168	212	86
CHHM10 - 614□ - (B) - Ratio	7.5	4	640	323	213	251	91		735	323	213	251	109
CHHM15 - 614□ - (B) - Ratio	11	4	700	323	213	251	104		795	323	213	251	122
CHHM20 - 614□ - (B) - Ratio	15	4	790	358	261	324	156		880	321	261	324	190

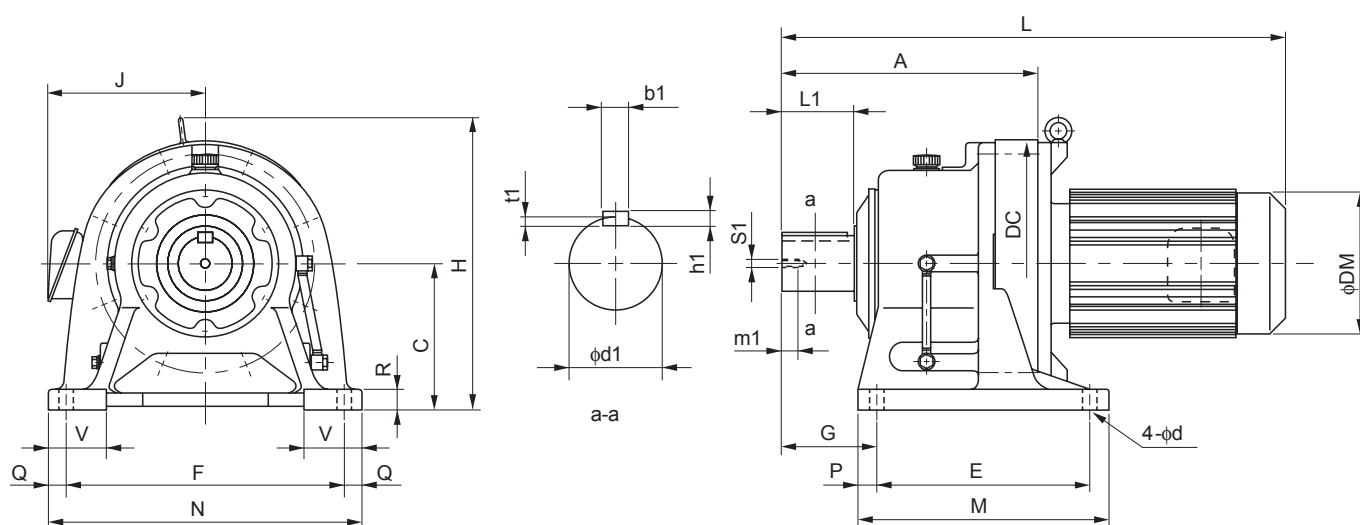
Note: 1. □ indicates motor capacity.

2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."

3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 616□ to 617□



GEARMOTORS

 Dimension Tables
CHHM

Frame size Note 4	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 6						
														d1	L1	b1	h1	t1	S1	m1
616□	308	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
617□	352	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24

Model Note 4, 5	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM1H - 616□ - (B) - Ratio	1.1	4	583	310	145	160	93	645	310	145	160	99
CHHM2 - 616□ - (B) - Ratio	1.5	4	583	310	145	160	93	645	310	145	160	99
CHHM3 - 616□ - (B) - Ratio	2.2	4	598	310	152	173	96	661	310	152	173	103
CHHM4 - 616□ - (B) - Ratio	3.0	4	621	310	168	212	105	693	310	168	212	116
CHHM5 - 616□ - (B) - Ratio	3.7	4	621	310	168	212	105	693	310	168	212	116
CHHM8 - 616□ - (B) - Ratio	5.5	4	665	310	168	212	112	737	310	168	212	123
CHHM10 - 616□ - (B) - Ratio	7.5	4	693	333	213	251	128	788	333	213	251	146
CHHM15 - 616□ - (B) - Ratio	11	4	753	333	213	251	142	848	333	213	251	160
*CHHM20 - 616□ - (B) - Ratio	15	4	838	368	261	324	195	928	368	261	324	230
*CHHM25 - 616□ - (B) - Ratio	18.5	4	933	368	328	394	267	1098	368	328	394	323
*CHHM30 - 616□ - (B) - Ratio	22	4	933	368	328	394	267	1098	368	328	394	323
CHHM4 - 617□ - (B) - Ratio	3.0	4	680	403	168	212	146	752	403	168	212	157
CHHM5 - 617□ - (B) - Ratio	3.7	4	680	403	168	212	146	752	403	168	212	157
CHHM8 - 617□ - (B) - Ratio	5.5	4	724	403	168	212	153	796	403	168	212	164
CHHM10 - 617□ - (B) - Ratio	7.5	4	742	403	213	251	168	837	403	213	251	187
CHHM15 - 617□ - (B) - Ratio	11	4	802	403	213	251	182	897	403	213	251	201
CHHM20 - 617□ - (B) - Ratio	15	4	882	413	259	324	236	987	413	259	324	271
CHHM25 - 617□ - (B) - Ratio	18.5	4	977	428	328	394	304	1142	428	328	394	360
CHHM30 - 617□ - (B) - Ratio	22	4	977	428	328	394	304	1142	428	328	394	360
CHHM40 - 617□ - (B) - Ratio	30	4	977	428	328	394	321	1142	428	328	394	369

*** indicates models with bottom level of the motor lower than the reducer base.

Refer to pages B-152 and B-153 for center height options.

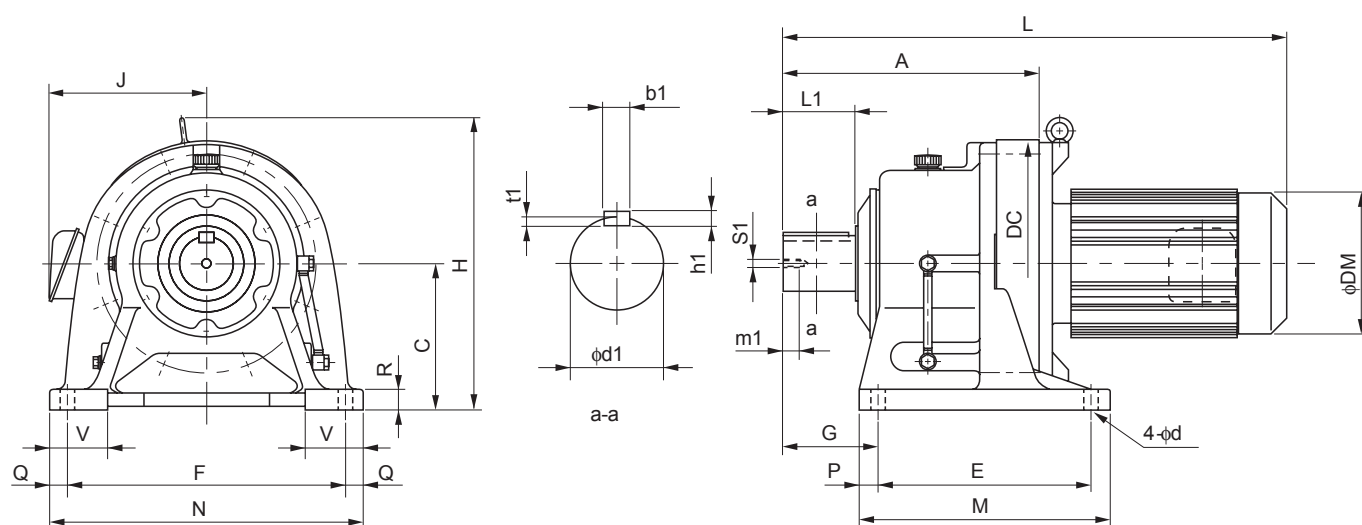
Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the frame size indicates models equipped with brake.

6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 618□ to 619□

Frame size Note 4	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 6						
														d1	L1	b1	h1	t1	S1	m1
618□	389	220	370	320	420	145	380	470	30	25	30	85	22	80	110	22	14	9	M12	24
619□	465	250	430	380	480	170	440	530	30	25	35	90	26	95	135	25	14	9	M20	34

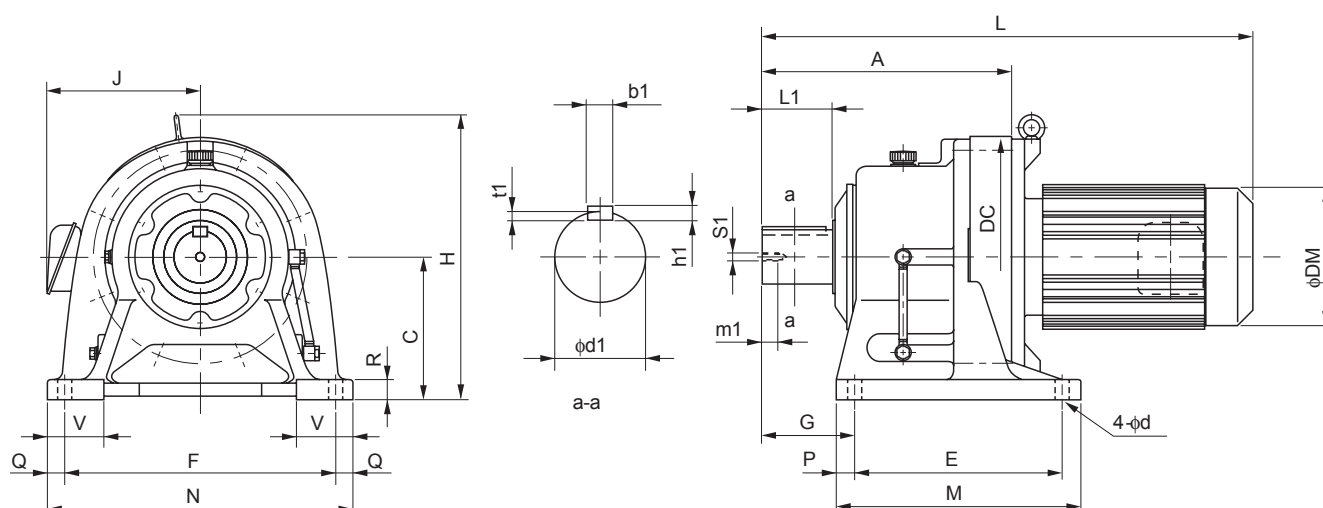
Model Note 4, 5	Motor		Standard					With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM4 - 618□ - (B) - Ratio	3.0	4	717	438	168	212	184	789	438	168	212	194
CHHM5 - 618□ - (B) - Ratio	3.7	4	717	438	168	212	184	789	438	168	212	194
CHHM8 - 618□ - (B) - Ratio	5.5	4	761	438	168	212	192	833	438	168	212	202
CHHM10 - 618□ - (B) - Ratio	7.5	4	779	438	213	251	207	874	438	213	251	225
CHHM15 - 618□ - (B) - Ratio	11	4	839	438	213	251	221	934	438	213	251	239
CHHM20 - 618□ - (B) - Ratio	15	4	919	438	261	324	281	1024	438	261	324	310
CHHM25 - 618□ - (B) - Ratio	18.5	4	1014	448	328	394	347	1179	448	328	394	398
CHHM30 - 618□ - (B) - Ratio	22	4	1014	448	328	394	347	1179	448	328	394	398
CHHM40 - 618□ - (B) - Ratio	30	4	1014	448	328	394	364	1179	448	328	394	407
CHHM50 - 618□ - (B) - Ratio	37	4	1129	481	328	394	412	1344	481	328	394	509
CHHM60 - 618□ - (B) - Ratio	45	4	1129	481	328	394	412	1344	481	328	394	509
CHHM8 - 619□ - (B) - Ratio	5.5	4	857	511	168	212	266	929	511	168	212	276
CHHM10 - 619□ - (B) - Ratio	7.5	4	870	511	213	251	279	965	511	213	251	297
CHHM15 - 619□ - (B) - Ratio	11	4	930	511	213	251	293	1025	511	213	251	311
CHHM20 - 619□ - (B) - Ratio	15	4	995	467	261	324	346	1100	467	261	324	381
CHHM25 - 619□ - (B) - Ratio	18.5	4	1090	511	328	394	422	1255	511	328	394	467
CHHM256 - 619□ - (B) - Ratio	18.5	6	1090	511	328	394	437	1255	511	328	394	480
CHHM30 - 619□ - (B) - Ratio	22	4	1090	511	328	394	422	1255	511	328	394	467
CHHM40 - 619□ - (B) - Ratio	30	4	1090	511	328	394	437	1255	511	328	394	480
CHHM406 - 619□ - (B) - Ratio	30	6	1205	511	328	394	475	1420	511	328	394	572
CHHM50 - 619□ - (B) - Ratio	37	4	1205	511	328	394	475	1420	511	328	394	572
CHHM506 - 619□ - (B) - Ratio	37	6	1205	511	328	394	475	1420	511	328	394	572
CHHM60 - 619□ - (B) - Ratio	45	4	1205	511	328	394	475	1420	511	328	394	572

Note: 1. □ indicates motor capacity.

2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."

3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 6205 to 6215

GEARMOTORS

Dimension Tables
CHHM

Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft ^{Note 2, 3, 6}						
														d1	L1	b1	h1	t1	S1	m1
6205	502	250	448	360	440	215	440	530	40	45	35	100	26	100	165	28	16	10	M20	34
6215	526	265	485	395	480	210	475	580	40	50	40	110	26	110	165	28	16	10	M20	34

Model ^{Note 5}	Motor		Standard						With Brake				
	kW	P	L	H	J	DM	W(kg)		L	H	J	DM	W(kg)
CHHM15 - 6205	- (B) - Ratio	11	4	972	530	213	251	313	1067	530	213	251	332
CHHM20 - 6205	- (B) - Ratio	15	4	1042	530	261	324	367	1147	530	261	324	404
CHHM206 - 6205	- (B) - Ratio	15	6	1127	530	328	394	438	1292	530	328	394	484
CHHM25 - 6205	- (B) - Ratio	18.5	4	1127	530	328	394	438	1292	530	328	394	488
CHHM30 - 6205	- (B) - Ratio	22	4	1127	530	328	394	438	1292	530	328	394	488
CHHM306 - 6205	- (B) - Ratio	22	6	1127	530	328	394	451	1292	530	328	394	501
CHHM40 - 6205	- (B) - Ratio	30	4	1127	530	328	394	451	1292	530	328	394	501
CHHM406 - 6205	- (B) - Ratio	30	6	1242	530	328	394	489	1457	530	328	394	588
CHHM50 - 6205	- (B) - Ratio	37	4	1242	530	328	394	489	1457	530	328	394	588
CHHM506 - 6205	- (B) - Ratio	37	6	1242	530	328	394	489	1457	530	328	394	588
CHHM60 - 6205	- (B) - Ratio	45	4	1242	530	328	394	489	1457	530	328	394	588
CHHM606 - 6205	- (B) - Ratio	45	6	1297	575	378	484	582	-	-	-	-	-
CHHM75 - 6205	- (B) - Ratio	55	4	1297	575	378	484	582	-	-	-	-	-
CHHM15 - 6215	- (B) - Ratio	11	4	996	575	213	251	395	1091	575	213	251	414
CHHM20 - 6215	- (B) - Ratio	15	4	1066	575	261	324	450	1171	575	261	324	486
CHHM206 - 6215	- (B) - Ratio	15	6	1151	575	328	394	515	1316	575	328	394	565
CHHM25 - 6215	- (B) - Ratio	18.5	4	1151	575	328	394	515	1316	575	328	394	565
CHHM256 - 6215	- (B) - Ratio	18.5	6	1151	575	328	394	528	1316	575	328	394	578
CHHM30 - 6215	- (B) - Ratio	22	4	1151	575	328	394	515	1316	575	328	394	565
CHHM306 - 6215	- (B) - Ratio	22	6	1151	575	328	394	528	1316	575	328	394	578
CHHM40 - 6215	- (B) - Ratio	30	4	1151	575	328	394	528	1316	575	328	394	578
CHHM406 - 6215	- (B) - Ratio	30	6	1266	575	328	394	566	1481	575	328	394	666
CHHM50 - 6215	- (B) - Ratio	37	4	1266	575	328	394	566	1481	575	328	394	666
CHHM506 - 6215	- (B) - Ratio	37	6	1266	575	328	394	566	1481	575	328	394	666
CHHM60 - 6215	- (B) - Ratio	45	4	1266	575	328	394	566	1481	575	328	394	666
CHHM606 - 6215	- (B) - Ratio	45	6	1321	575	378	484	676	-	-	-	-	-
CHHM75 - 6215	- (B) - Ratio	55	4	1321	575	378	484	676	-	-	-	-	-

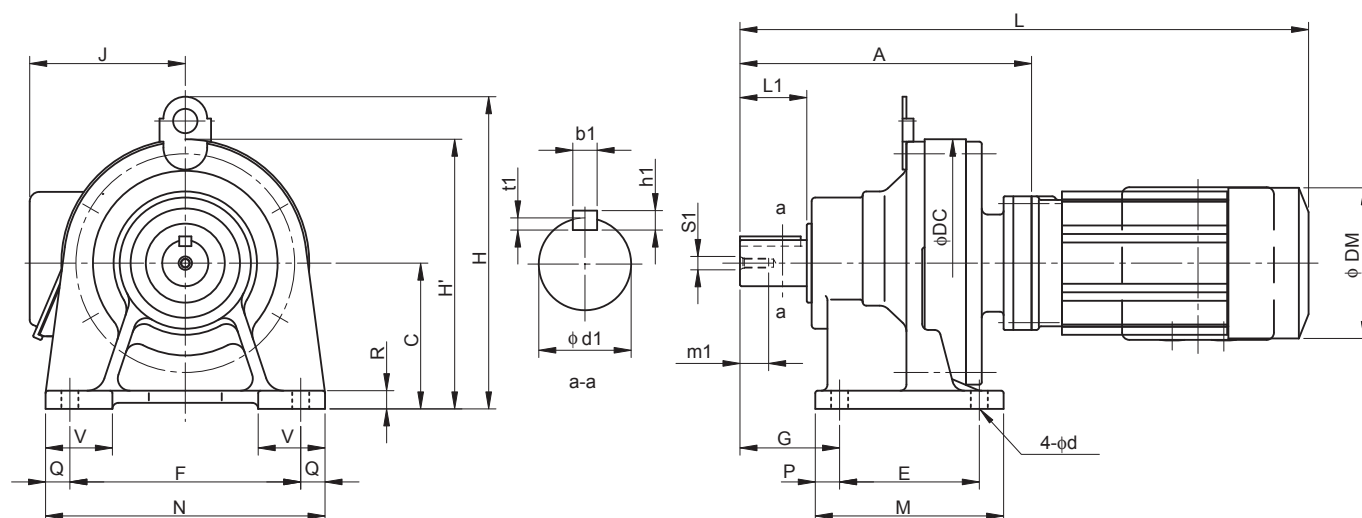
Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the frame size indicates models equipped with brake.

6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Universal Direction, Foot-Mount)

CNHM^{Note 1} - 606□DA to 612□DB

Frame size Note 4	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 6						
														d1	L1	b1	h1	t1	S1	m1
606□DA	125	80	110	60	120	41	84	144	12	12	10	35	9	14	25	5	5	3	M5	16
607□DA	131	80	110	60	120	47	84	144	12	12	10	35	9	18	30	6	6	3.5	M6	16
609□DA	190	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
610□DA	204	100	150	90	150	60	135	180	15	15	12	40	11	28	35	8	7	4	M8	20
612□DA	240	120	204	115	190	82	155	230	20	20	15	55	14	38	55	10	8	5	M8	20
612□DB	252	120	204	115	190	82	155	230	20	20	15	55	14	38	55	10	8	5	M8	20

Model Note 4, 5	Motor		Standard						With Brake					
	kW	P	L	H	H'	J	DM	W(kg)	L	H	H'	J	DM	W(kg)
CNHM01 - 606□DA - (B) - Ratio	0.1	4	287	-	140	130	119	9	294	-	138	130	124	10
CNHM01 - 607□DA - (B) - Ratio	0.1	4	293	-	140	130	119	9	300	-	138	130	124	10
CNHM02 - 607□DA - (B) - Ratio	0.2	4	311	-	140	130	124	10	339	-	138	130	124	11
CNHM01 - 609□DA - (B) - Ratio	0.1	4	352	207	-	130	119	17	359	207	-	130	124	18
CNHM02 - 609□DA - (B) - Ratio	0.2	4	370	207	-	130	124	18	398	207	-	130	124	19
CNHM03 - 609□DA - (B) - Ratio	0.25	4	370	207	-	130	124	18	398	207	-	130	124	19
CNHM05 - 609□DA - (B) - Ratio	0.4	4	386	207	-	130	124	19	418	207	-	130	124	20
CNHM01 - 610□DA - (B) - Ratio	0.1	4	366	207	-	130	119	19	373	207	-	130	124	20
CNHM02 - 610□DA - (B) - Ratio	0.2	4	384	207	-	130	124	20	412	207	-	130	124	21
CNHM03 - 610□DA - (B) - Ratio	0.25	4	384	207	-	130	124	20	412	207	-	130	124	21
CNHM05 - 610□DA - (B) - Ratio	0.4	4	400	207	-	130	124	21	432	207	-	130	124	22
CNHM01 - 612□DA - (B) - Ratio	0.1	4	402	257	-	130	119	30	409	257	-	130	124	31
CNHM02 - 612□DA - (B) - Ratio	0.2	4	420	257	-	130	124	31	448	257	-	130	124	32
CNHM03 - 612□DA - (B) - Ratio	0.25	4	420	257	-	130	124	31	448	257	-	130	124	32
CNHM05 - 612□DA - (B) - Ratio	0.4	4	436	257	-	130	124	32	468	257	-	130	124	33
CNHM01 - 612□DB - (B) - Ratio	0.1	4	414	257	-	130	119	33	421	257	-	130	124	35
CNHM02 - 612□DB - (B) - Ratio	0.2	4	432	257	-	130	124	34	473	257	-	130	124	36
CNHM03 - 612□DB - (B) - Ratio	0.25	4	432	257	-	130	124	34	473	257	-	130	124	36
CNHM05 - 612□DB - (B) - Ratio	0.4	4	448	257	-	130	124	35	473	257	-	130	124	37
CNHM08 - 612□DB - (B) - Ratio	0.55	4	489	257	-	140	148	39	532	257	-	140	148	42
CNHM1 - 612□DB - (B) - Ratio	0.75	4	489	257	-	140	148	39	532	257	-	140	148	42
CNHM1H - 612□DB - (B) - Ratio	1.1	4	516	257	-	145	160	42	578	257	-	145	160	47
CNHM2 - 612□DB - (B) - Ratio	1.5	4	516	257	-	145	160	42	578	257	-	145	160	47

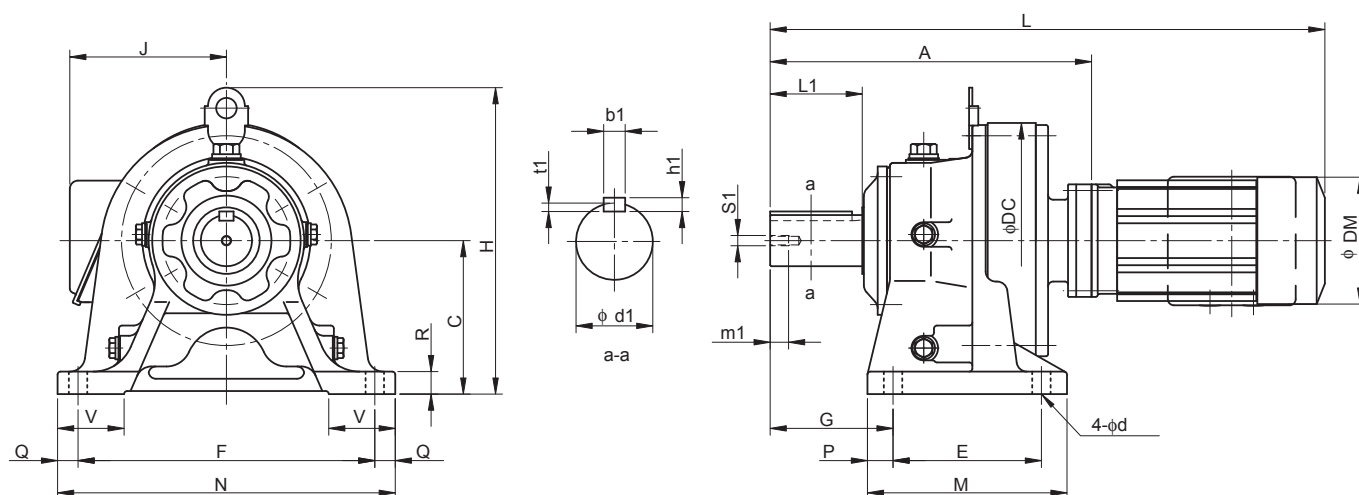
Note: 1. □ indicates motor capacity.

2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."

3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 613□DA to 614□DC



GEARMOTORS

Dimension Tables
CHHM

Frame size Note 4	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 6						
														d1	L1	b1	h1	t1	S1	m1
613□DA	294	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
613□DB	303	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
613□DC	317	150	230	145	290	100	195	330	25	20	22	65	18	50	70	14	9	5.5	M10	18
614□DA	314	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18
614□DB	323	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18
614□DC	337	150	230	145	290	120	195	330	25	20	22	65	18	50	90	14	9	5.5	M10	18

Model Note 4, 5	Motor		Standard						With Brake				
	kW	P	L	H	J	DM	W(kg)		L	H	J	DM	W(kg)
CHHM02 - 613□DA - (B) - Ratio	0.2	4	474	300	130	124	47		502	300	130	124	47
CHHM03 - 613□DA - (B) - Ratio	0.25	4	474	300	130	124	48		522	300	130	124	49
CHHM05 - 613□DA - (B) - Ratio	0.4	4	490	300	130	124	48		522	300	130	124	49
CHHM02 - 613□DB - (B) - Ratio	0.2	4	483	300	130	124	49		511	300	130	124	51
CHHM03 - 613□DB - (B) - Ratio	0.25	4	483	300	130	124	49		511	300	130	124	51
CHHM05 - 613□DB - (B) - Ratio	0.4	4	499	300	130	124	50		531	300	130	124	52
CHHM08 - 613□DB - (B) - Ratio	0.55	4	540	263	140	148	54		583	263	140	148	57
CHHM1 - 613□DB - (B) - Ratio	0.75	4	540	263	140	148	54		583	263	140	148	57
CHHM1H - 613□DB - (B) - Ratio	1.1	4	573	270	145	160	57		635	270	145	160	62
CHHM2 - 613□DB - (B) - Ratio	1.5	4	573	270	145	160	57		635	270	145	160	62
CHHM08 - 613□DC - (B) - Ratio	0.55	4	554	265	140	148	56		597	265	140	148	59
CHHM1 - 613□DC - (B) - Ratio	0.75	4	554	265	140	148	56		597	265	140	148	59
CHHM2 - 613□DC - (B) - Ratio	1.5	4	587	272	145	160	59		649	272	145	160	64
CHHM3 - 613□DC - (B) - Ratio	2.2	4	607	276	152	173	64		670	276	152	173	70
CHHM02 - 614□DA - (B) - Ratio	0.2	4	494	300	130	124	47		522	300	130	124	48
CHHM03 - 614□DA - (B) - Ratio	0.25	4	494	300	130	124	47		522	300	130	124	48
CHHM05 - 614□DA - (B) - Ratio	0.4	4	510	300	130	124	48		542	300	130	124	49
CHHM02 - 614□DB - (B) - Ratio	0.2	4	503	300	130	124	49		531	300	130	124	51
CHHM03 - 614□DB - (B) - Ratio	0.25	4	503	300	130	124	49		531	300	130	124	51
CHHM05 - 614□DB - (B) - Ratio	0.4	4	519	300	130	124	50		551	300	130	124	52
CHHM08 - 614□DB - (B) - Ratio	0.55	4	560	263	140	148	54		603	263	140	148	57
CHHM1 - 614□DB - (B) - Ratio	0.75	4	560	263	140	148	54		603	263	140	148	57
CHHM1H - 614□DB - (B) - Ratio	1.1	4	593	270	145	160	57		655	270	145	160	62
CHHM2 - 614□DB - (B) - Ratio	1.5	4	593	270	145	160	57		655	270	145	160	62
CHHM08 - 614□DC - (B) - Ratio	0.55	4	574	265	140	148	56		617	265	140	148	59
CHHM1 - 614□DC - (B) - Ratio	0.75	4	574	265	140	148	56		617	265	140	148	59
CHHM1H - 614□DC - (B) - Ratio	1.1	4	607	270	145	160	60		669	270	145	160	65
CHHM2 - 614□DC - (B) - Ratio	1.5	4	607	270	145	160	60		669	270	145	160	65
CHHM3 - 614□DC - (B) - Ratio	2.2	4	627	276	152	173	64		690	276	152	173	70

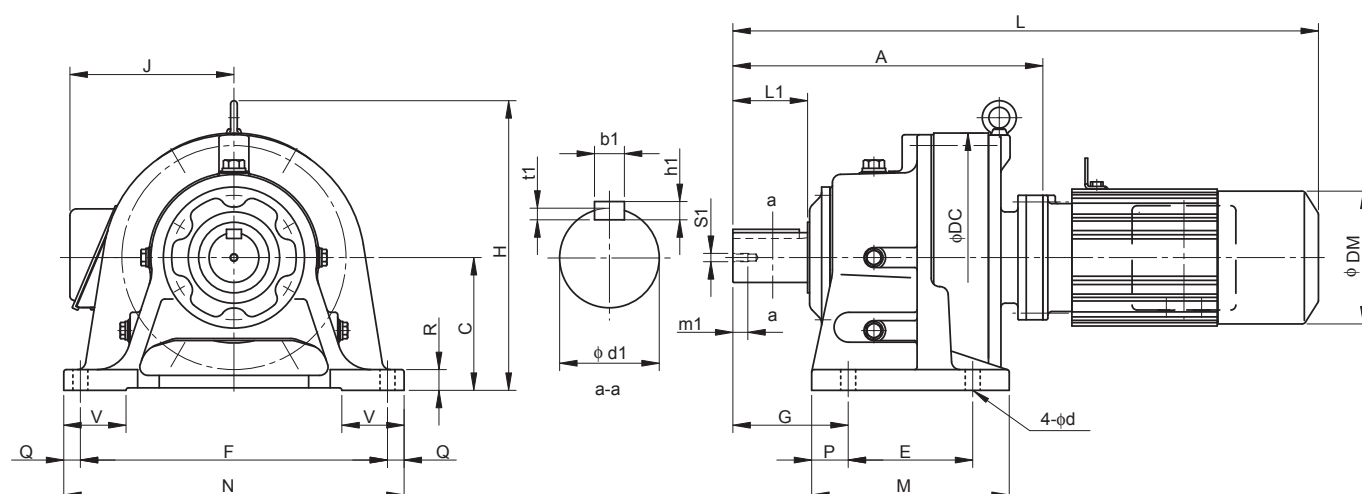
Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the frame size indicates models equipped with brake.

6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 616□DA to 618□DA

Frame size Note 4	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 6						
														d1	L1	b1	h1	t1	S1	m1
616□DA	373	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
616□DB	387	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
617□DA	418	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24
617□DB	432	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24
618□DA	474	220	370	320	420	145	380	470	30	25	30	85	22	80	110	22	14	9	M12	24

Model Note 4, 5	Motor		Standard						With Brake				
	kW	P	L	H	J	DM	W(kg)		L	H	J	DM	W(kg)
CHHM02 - 616□DA - (B) - Ratio	0.2	4	553	349	130	124	90		581	349	130	124	92
CHHM03 - 616□DA - (B) - Ratio	0.25	4	553	349	130	124	90		581	349	130	124	92
CHHM05 - 616□DA - (B) - Ratio	0.4	4	569	349	130	124	91		601	349	130	124	93
CHHM08 - 616□DA - (B) - Ratio	0.55	4	610	349	140	148	95		653	349	140	148	98
CHHM1 - 616□DA - (B) - Ratio	0.75	4	610	349	140	148	95		653	349	140	148	98
CHHM1H - 616□DA - (B) - Ratio	1.1	4	643	349	145	160	99		705	349	145	160	104
CHHM2 - 616□DA - (B) - Ratio	1.5	4	643	349	145	160	99		705	349	145	160	104
CHHM08 - 616□DB - (B) - Ratio	0.55	4	624	349	140	148	97		667	349	140	148	100
CHHM1 - 616□DB - (B) - Ratio	0.75	4	624	349	140	148	97		667	349	140	148	100
CHHM1H - 616□DB - (B) - Ratio	1.1	4	657	349	145	160	101		719	349	145	160	106
CHHM2 - 616□DB - (B) - Ratio	1.5	4	657	349	145	160	101		719	349	145	160	106
CHHM3 - 616□DB - (B) - Ratio	2.2	4	677	349	152	173	105		740	349	152	173	111
CHHM02 - 617□DA - (B) - Ratio	0.2	4	598	416	130	124	120		626	416	130	124	127
CHHM03 - 617□DA - (B) - Ratio	0.25	4	598	416	130	124	120		626	416	130	124	127
CHHM05 - 617□DA - (B) - Ratio	0.4	4	614	416	130	124	126		646	416	130	124	128
CHHM08 - 617□DA - (B) - Ratio	0.55	4	655	416	140	148	130		698	416	140	148	133
CHHM1 - 617□DA - (B) - Ratio	0.75	4	655	416	140	148	130		698	416	140	148	133
CHHM1H - 617□DA - (B) - Ratio	1.1	4	688	416	145	160	133		750	416	145	160	138
CHHM2 - 617□DA - (B) - Ratio	1.5	4	688	416	145	160	133		750	416	145	160	138
CHHM08 - 617□DB - (B) - Ratio	0.55	4	669	416	140	148	127		712	416	140	148	134
CHHM1 - 617□DB - (B) - Ratio	0.75	4	669	416	140	148	127		712	416	140	148	134
CHHM1H - 617□DB - (B) - Ratio	1.1	4	702	416	145	160	136		764	416	145	160	141
CHHM2 - 617□DB - (B) - Ratio	1.5	4	702	416	145	160	136		764	416	145	160	141
CHHM3 - 617□DB - (B) - Ratio	2.2	4	722	416	152	173	140		785	416	152	173	146
CHHM05 - 618□DA - (B) - Ratio	0.4	4	670	451	130	124	171		702	451	130	124	173
CHHM08 - 618□DA - (B) - Ratio	0.55	4	711	451	140	148	175		754	451	140	148	178
CHHM1 - 618□DA - (B) - Ratio	0.75	4	711	451	140	148	175		754	451	140	148	178
CHHM1H - 618□DA - (B) - Ratio	1.1	4	744	451	145	160	179		806	451	145	160	184
CHHM2 - 618□DA - (B) - Ratio	1.5	4	744	451	145	160	179		806	451	145	160	184
CHHM3 - 618□DA - (B) - Ratio	2.2	4	764	451	152	173	183		827	451	152	173	189

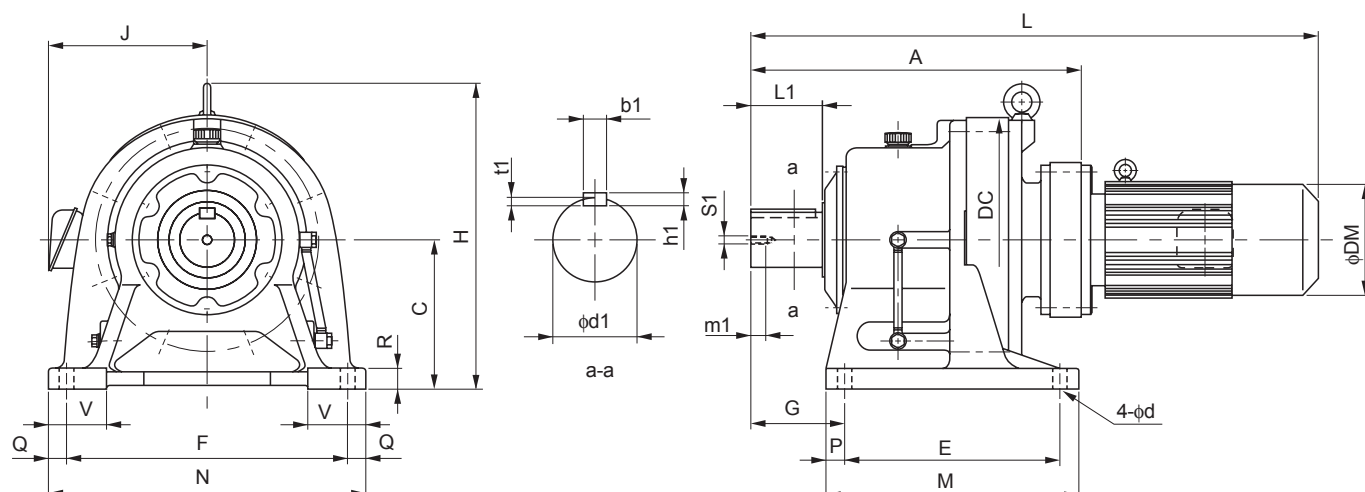
Note: 1. □ indicates motor capacity.

2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."

3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 616□DC to 619□DA



GEARMOTORS

Dimension Tables
CHHM

Frame size Note 4	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 6						
														d1	L1	b1	h1	t1	S1	m1
616□DC	389	160	300	150	370	139	238	410	44	20	25	75	18	60	90	18	11	7	M10	18
617□DC	436	200	340	275	380	125	335	430	30	25	30	80	22	70	90	20	12	7.5	M12	24
618□DB	496	220	370	320	420	145	380	470	30	25	30	85	22	80	110	22	14	9	M12	24
619□DA	556	250	430	380	480	170	440	530	30	25	35	90	26	95	135	25	14	9	M20	34

Model Note 4, 5	Motor		Standard						With Brake				
	kW	P	L	H	J	DM	W(kg)		L	H	J	DM	W(kg)
CHHM1H - 616□DC - (B) - Ratio	1.1	4	659	349	145	160	107		721	349	145	160	112
CHHM2 - 616□DC - (B) - Ratio	1.5	4	659	349	145	160	107		721	349	145	160	112
CHHM3 - 616□DC - (B) - Ratio	2.2	4	679	349	152	173	111		742	349	152	173	118
CHHM4 - 616□DC - (B) - Ratio	3.0	4	702	349	168	212	121		774	349	168	212	131
CHHM5 - 616□DC - (B) - Ratio	3.7	4	702	349	168	212	121		774	349	168	212	131
CHHM8 - 616□DC - (B) - Ratio	5.5	4	746	349	168	212	128		818	349	168	212	138
CHHM1H - 617□DC - (B) - Ratio	1.1	4	706	416	145	160	141		768	416	145	160	146
CHHM2 - 617□DC - (B) - Ratio	1.5	4	706	416	145	160	141		768	416	145	160	146
CHHM3 - 617□DC - (B) - Ratio	2.2	4	726	416	152	173	145		789	416	152	173	152
CHHM4 - 617□DC - (B) - Ratio	3.0	4	749	416	168	212	155		821	416	168	212	165
CHHM5 - 617□DC - (B) - Ratio	3.7	4	749	416	168	212	155		821	416	168	212	165
CHHM8 - 617□DC - (B) - Ratio	5.5	4	793	416	168	212	162		865	416	168	212	172
CHHM1H - 618□DB - (B) - Ratio	1.1	4	766	451	145	160	194		828	451	145	160	199
CHHM2 - 618□DB - (B) - Ratio	1.5	4	766	451	145	160	194		828	451	145	160	199
CHHM3 - 618□DB - (B) - Ratio	2.2	4	786	451	152	173	197		849	451	152	173	204
CHHM4 - 618□DB - (B) - Ratio	3.0	4	809	451	168	212	207		881	451	168	212	217
CHHM5 - 618□DB - (B) - Ratio	3.7	4	809	451	168	212	207		881	451	168	212	217
CHHM8 - 618□DB - (B) - Ratio	5.5	4	853	451	168	212	214		925	451	168	212	224
CHHM10 - 618□DB - (B) - Ratio	7.5	4	876	451	213	251	229		971	451	213	251	247
CHHM15 - 618□DB - (B) - Ratio	11	4	936	451	213	251	243		1031	451	213	251	261
CHHM1 - 619□DA - (B) - Ratio	0.75	4	793	531	140	148	250		836	531	140	148	253
CHHM1H - 619□DA - (B) - Ratio	1.1	4	826	531	145	160	254		888	531	145	160	259
CHHM2 - 619□DA - (B) - Ratio	1.5	4	826	531	145	160	254		888	531	145	160	259
CHHM3 - 619□DA - (B) - Ratio	2.2	4	846	531	152	173	258		909	531	152	173	265
CHHM4 - 619□DA - (B) - Ratio	3.0	4	869	531	168	212	268		941	531	168	212	278
CHHM5 - 619□DA - (B) - Ratio	3.7	4	869	531	168	212	268		941	531	168	212	278
CHHM8 - 619□DA - (B) - Ratio	5.5	4	913	531	168	212	275		985	531	168	212	285

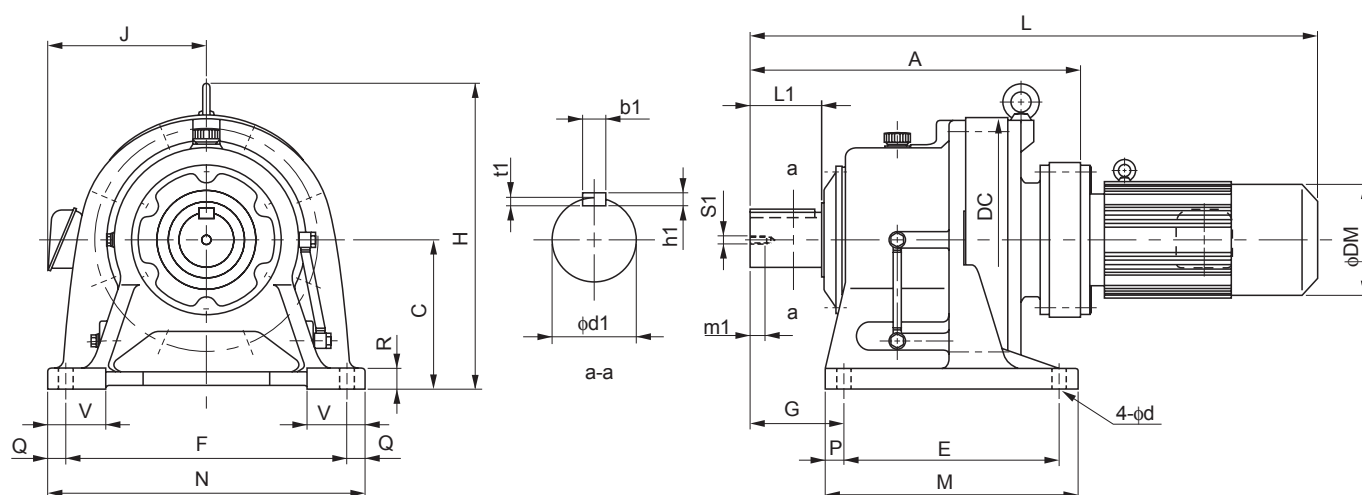
Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the frame size indicates models equipped with brake.

6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 619□DB to 6215DA

Frame size Note 4	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 6						
														d1	L1	b1	h1	t1	S1	m1
619□DB	572	250	430	380	480	170	440	530	30	25	35	90	26	95	135	25	14	9	M20	34
6205DA	597	250	448	360	440	215	440	530	40	45	35	100	26	100	165	28	16	10	M20	34
6205DB	624	250	448	360	440	215	440	530	40	45	35	100	26	100	165	28	16	10	M20	34
6215DA	650	265	485	395	480	210	475	580	40	50	40	110	26	110	165	28	16	10	M20	34

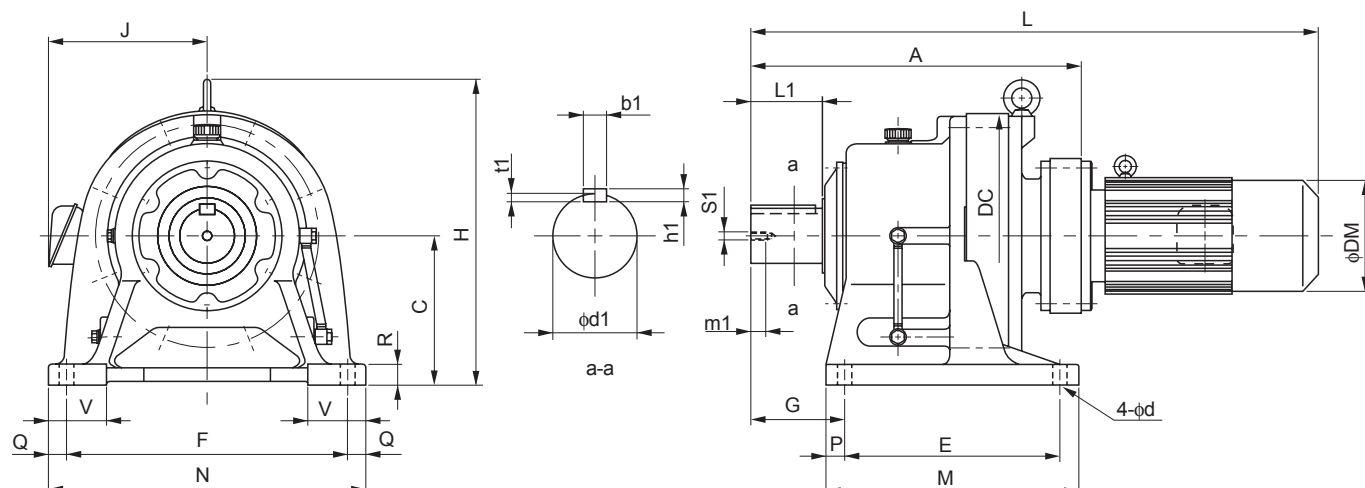
Model Note 4, 5	Motor		Standard						With Brake				
	kW	P	L	H	J	DM	W(kg)		L	H	J	DM	W(kg)
CHHM2 - 619□DB - (B) - Ratio	1.5	4	842	531	145	160	261		904	531	145	160	266
CHHM3 - 619□DB - (B) - Ratio	2.2	4	862	531	152	173	265		925	531	152	173	272
CHHM4 - 619□DB - (B) - Ratio	3.0	4	885	531	168	212	275		957	531	168	212	285
CHHM5 - 619□DB - (B) - Ratio	3.7	4	885	531	168	212	275		957	531	168	212	285
CHHM8 - 619□DB - (B) - Ratio	5.5	4	929	531	168	212	282		1001	531	168	212	292
CHHM10 - 619□DB - (B) - Ratio	7.5	4	952	531	213	251	297		1047	531	213	251	315
CHHM15 - 619□DB - (B) - Ratio	11	4	1012	531	213	251	311		1107	531	213	251	329
CHHM20 - 619□DB - (B) - Ratio	15	4	1102	531	261	324	363		1207	531	261	324	397
CHHM1 - 6205DA - (B) - Ratio	0.75	4	834	530	140	148	269		877	530	140	148	272
CHHM2 - 6205DA - (B) - Ratio	1.5	4	867	530	145	160	273		929	530	145	160	278
CHHM3 - 6205DA - (B) - Ratio	2.2	4	887	530	152	173	277		949	530	152	173	284
CHHM4 - 6205DA - (B) - Ratio	3.0	4	910	530	168	212	287		982	530	168	212	297
CHHM5 - 6205DA - (B) - Ratio	3.7	4	910	530	168	212	287		982	530	168	212	297
CHHM8 - 6205DA - (B) - Ratio	5.5	4	954	530	168	212	294		1026	530	168	212	304
CHHM3 - 6205DB - (B) - Ratio	2.2	4	914	530	152	173	289		977	530	152	173	296
CHHM4 - 6205DB - (B) - Ratio	3.0	4	937	530	168	212	299		1009	530	168	212	309
CHHM5 - 6205DB - (B) - Ratio	3.7	4	937	530	168	212	299		1009	530	168	212	309
CHHM8 - 6205DB - (B) - Ratio	5.5	4	981	530	168	212	306		1053	530	168	212	316
CHHM10 - 6205DB - (B) - Ratio	7.5	4	1004	530	213	251	321		1099	530	213	251	339
CHHM15 - 6205DB - (B) - Ratio	11	4	1064	530	213	251	334		1159	530	213	251	352
CHHM20 - 6205DB - (B) - Ratio	15	4	1154	530	261	324	386		1249	530	261	324	419
CHHM2 - 6215DA - (B) - Ratio	1.5	4	920	575	145	160	367		982	575	145	160	372
CHHM3 - 6215DA - (B) - Ratio	2.2	4	940	575	152	173	370		1003	575	152	173	377
CHHM4 - 6215DA - (B) - Ratio	3.0	4	963	575	168	212	380		1035	575	168	212	390
CHHM5 - 6215DA - (B) - Ratio	3.7	4	963	575	168	212	380		1035	575	168	212	390
CHHM8 - 6215DA - (B) - Ratio	5.5	4	1007	575	168	212	387		1079	575	168	212	397
CHHM10 - 6215DA - (B) - Ratio	7.5	4	1030	575	213	251	402		1125	575	213	251	420
CHHM15 - 6215DA - (B) - Ratio	11	4	1090	575	213	251	415		1185	575	213	251	433
CHHM20 - 6215DA - (B) - Ratio	15	4	1180	575	261	324	467		1285	575	261	324	501

Note: 1. □ indicates motor capacity.

2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."

3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 6215DB to 6225DB

GEARMOTORS

Dimension Tables
CHHM

Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft ^{Note 2, 3, 6}						
														d1	L1	b1	h1	t1	S1	m1
6215DB	675	265	485	395	480	210	475	580	40	50	40	110	26	110	165	28	16	10	M20	34
6225DA	692	280	526	420	540	230	520	620	50	40	40	115	33	120	165	32	18	11	M20	34
6225DB	735	280	526	420	540	230	520	620	50	40	40	115	33	120	165	32	18	11	M20	34

Model ^{Note 5}	Motor		Standard						With Brake				
	kW	P	L	H	J	DM	W(kg)		L	H	J	DM	W(kg)
CHHM5 - 6215DB - (B) - Ratio	3.7	4	993	575	168	212	399		1065	575	168	212	409
CHHM8 - 6215DB - (B) - Ratio	5.5	4	1037	575	168	212	406		1109	575	168	212	416
CHHM10 - 6215DB - (B) - Ratio	7.5	4	1060	575	213	251	422		1155	575	213	251	439
CHHM15 - 6215DB - (B) - Ratio	11	4	1120	575	213	251	436		1215	575	213	251	453
CHHM20 - 6215DB - (B) - Ratio	15	4	1205	575	261	324	489		1310	575	261	324	523
CHHM25 - 6215DB - (B) - Ratio	18.5	4	1300	575	328	394	564		1465	575	328	394	615
CHHM30 - 6215DB - (B) - Ratio	22	4	1300	575	328	394	564		1465	575	328	394	615
CHHM2 - 6225DA - (B) - Ratio	1.5	4	962	610	145	160	441		1024	610	145	160	446
CHHM3 - 6225DA - (B) - Ratio	2.2	4	982	610	152	173	444		1045	610	152	173	451
CHHM4 - 6225DA - (B) - Ratio	3.0	4	1005	610	168	212	454		1077	610	168	212	464
CHHM5 - 6225DA - (B) - Ratio	3.7	4	1005	610	168	212	454		1077	610	168	212	464
CHHM8 - 6225DA - (B) - Ratio	5.5	4	1049	610	168	212	461		1121	610	168	212	471
CHHM10 - 6225DA - (B) - Ratio	7.5	4	1072	610	213	251	476		1167	610	213	251	494
CHHM15 - 6225DA - (B) - Ratio	11	4	1132	610	213	251	490		1227	610	213	251	508
CHHM20 - 6225DA - (B) - Ratio	15	4	1222	610	261	324	542		1327	610	261	324	576
CHHM5 - 6225DB - (B) - Ratio	3.7	4	1058	610	168	212	499		1130	610	168	212	510
CHHM8 - 6225DB - (B) - Ratio	5.5	4	1102	610	168	212	506		1174	610	168	212	517
CHHM10 - 6225DB - (B) - Ratio	7.5	4	1125	610	213	251	521		1220	610	213	251	539
CHHM15 - 6225DB - (B) - Ratio	11	4	1185	610	213	251	535		1280	610	213	251	553
CHHM20 - 6225DB - (B) - Ratio	15	4	1265	610	261	324	589		1370	610	261	324	623
CHHM25 - 6225DB - (B) - Ratio	18.5	4	1360	610	328	394	661		1525	610	328	394	712
CHHM30 - 6225DB - (B) - Ratio	22	4	1360	610	328	394	661		1525	610	328	394	712
CHHM40 - 6225DB - (B) - Ratio	30	4	1360	610	328	394	678		1525	610	328	394	729

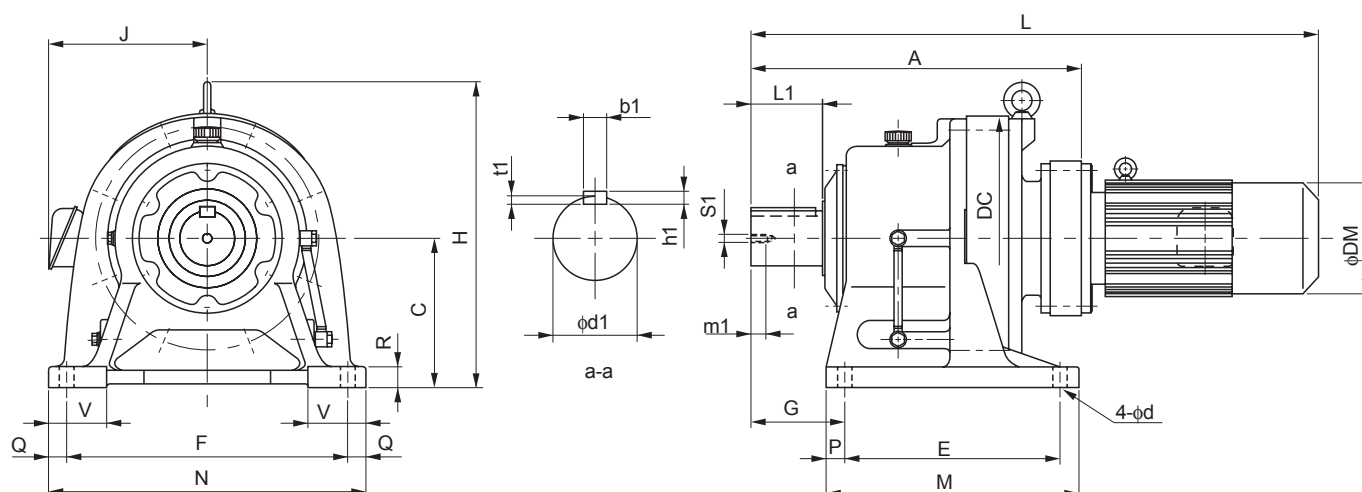
Note: 4. □ indicates 0 or 5, expressing combination with reduction ratio. Refer to the Selection Table for details.

5. "B" after the frame size indicates models equipped with brake.

6. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

7. Dimensions in above drawings are subject to change without notice.

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM^{Note 1} - 6235DA to 6245DB

Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 5						
														d1	L1	b1	h1	t1	S1	m1
6235DA	778	300	562	460	580	260	560	670	50	45	45	120	33	130	200	32	18	11	M24	41
6235DB	800	300	562	460	580	260	560	670	50	45	45	120	33	130	200	32	18	11	M24	41
6245DA	816	335	614	480	630	263	580	720	50	45	45	128	39	140	200	36	20	12	M24	41
6245DB	837	335	614	480	630	263	580	720	50	45	45	128	39	140	200	36	20	12	M24	41

Model	Note 4	Motor		Standard					With Brake				
		kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)
CHHM3 - 6235DA - (B) - Ratio		2.2	4	1068	667	152	173	561	1131	667	152	173	567
CHHM4 - 6235DA - (B) - Ratio		3.0	4	1091	667	168	212	570	1163	667	168	212	580
CHHM5 - 6235DA - (B) - Ratio		3.7	4	1091	667	168	212	570	1163	667	168	212	580
CHHM8 - 6235DA - (B) - Ratio		5.5	4	1135	667	168	212	577	1207	667	168	212	587
CHHM10 - 6235DA - (B) - Ratio		7.5	4	1163	667	213	251	593	1258	667	213	251	610
CHHM15 - 6235DA - (B) - Ratio		11	4	1223	667	213	251	607	1318	667	213	251	624
CHHM20 - 6235DA - (B) - Ratio		15	4	1308	667	261	324	660	1413	667	261	324	624
CHHM25 - 6235DA - (B) - Ratio		18.5	4	1403	667	328	394	737	1568	667	328	394	788
CHHM30 - 6235DA - (B) - Ratio		22	4	1403	667	328	394	737	1568	667	328	394	788
CHHM15 - 6235DB - (B) - Ratio		11	4	1245	667	213	251	639	1340	667	213	251	657
CHHM20 - 6235DB - (B) - Ratio		15	4	1330	667	261	324	701	1435	667	261	324	735
CHHM25 - 6235DB - (B) - Ratio		18.5	4	1425	667	328	394	768	1590	667	328	394	819
CHHM30 - 6235DB - (B) - Ratio		22	4	1425	667	328	394	768	1590	667	328	394	819
CHHM40 - 6235DB - (B) - Ratio		30	4	1425	667	328	394	782	1590	667	328	394	825
CHHM50 - 6235DB - (B) - Ratio		37	4	1540	667	328	394	820	1755	667	328	394	917
CHHM3 - 6245DA - (B) - Ratio		2.2	4	1106	729	152	173	670	1169	729	152	173	676
CHHM4 - 6245DA - (B) - Ratio		3.0	4	1129	729	168	212	679	1201	729	168	212	689
CHHM5 - 6245DA - (B) - Ratio		3.7	4	1129	729	168	212	679	1201	729	168	212	689
CHHM8 - 6245DA - (B) - Ratio		5.5	4	1173	729	168	212	686	1245	729	168	212	696
CHHM10 - 6245DA - (B) - Ratio		7.5	4	1201	729	213	251	702	1296	729	213	251	719
CHHM15 - 6245DA - (B) - Ratio		11	4	1261	729	213	251	716	1356	729	213	251	733
CHHM20 - 6245DA - (B) - Ratio		15	4	1346	729	261	324	769	1451	729	261	324	803
CHHM25 - 6245DA - (B) - Ratio		18.5	4	1441	729	328	394	840	1606	729	328	394	891
CHHM30 - 6245DA - (B) - Ratio		22	4	1441	729	328	394	840	1606	729	328	394	891
CHHM15 - 6245DB - (B) - Ratio		11	4	1282	729	213	251	740	1377	729	213	251	758
CHHM20 - 6245DB - (B) - Ratio		15	4	1367	729	261	324	800	1472	729	261	324	834
CHHM25 - 6245DB - (B) - Ratio		18.5	4	1462	729	328	394	866	1627	729	328	394	917
CHHM30 - 6245DB - (B) - Ratio		22	4	1462	729	328	394	866	1627	729	328	394	917
CHHM40 - 6245DB - (B) - Ratio		30	4	1462	729	328	394	883	1627	729	328	394	926
CHHM50 - 6245DB - (B) - Ratio		37	4	1577	729	328	394	935	1792	729	328	394	1032

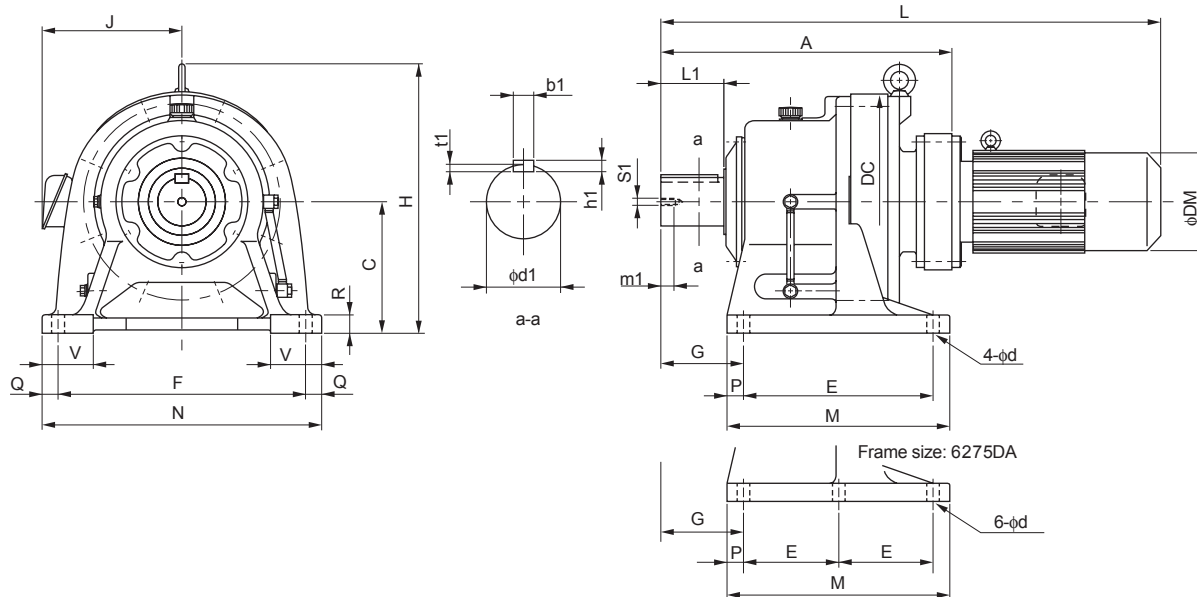
Note: 1. □ indicates motor capacity.

2. Dimension of shaft end diameter: Dimension tolerance conforms to JIS B 0401-1976 "h6."

3. Dimension of shaft end key: Dimension tolerance conforms to JIS B 1301-1996 "Parallel Key."

Dimension Tables Gearmotors (Horizontal Direction, Foot-Mount)

CHHM - 6255DA to 6275DA



Frame size	A	C	DC	E	F	G	M	N	P	Q	R	V	d	Output Shaft Note 2, 3, 5						
														d1	L1	b1	h1	t1	S1	m1
6255DA	956	375	670	520	670	320	630	780	55	55	50	140	39	160	240	40	22	13	M30	49
6255DB	978	375	670	520	670	320	630	780	55	55	50	140	39	160	240	40	22	13	M30	49
6265DA	1088	400	736	590	770	390	700	880	55	55	55	160	45	170	300	40	22	13	M30	49
6275DA	1349	540	950	420	1050	485	1040	1160	100	55	60	200	45	180	330	45	25	15	M30	52

Model Note 4	Motor		Standard							With Brake				
	kW	P	L	H	J	DM	W(kg)	L	H	J	DM	W(kg)	L	H
CHHM5 - 6255DA - (B) - Ratio	3.7	4	1284	815	168	212	1031	1356	815	168	212	1041	1356	815
CHHM8 - 6255DA - (B) - Ratio	5.5	4	1328	815	168	212	1041	1400	815	168	212	1051	1400	815
CHHM10 - 6255DA - (B) - Ratio	7.5	4	1346	815	213	251	1056	1441	815	213	251	1071	1441	815
CHHM15 - 6255DA - (B) - Ratio	11	4	1406	815	213	251	1071	1501	815	213	251	1086	1501	815
CHHM20 - 6255DA - (B) - Ratio	15	4	1486	815	261	324	1121	1591	815	261	324	1157	1591	815
CHHM25 - 6255DA - (B) - Ratio	18.5	4	1581	815	328	394	1195	1746	815	328	394	1246	1746	815
CHHM30 - 6255DA - (B) - Ratio	22	4	1581	815	328	394	1195	1746	815	328	394	1246	1746	815
CHHM40 - 6255DA - (B) - Ratio	30	4	1581	815	328	394	1215	1746	815	328	394	1258	1746	815
CHHM15 - 6255DB - (B) - Ratio	11	4	1443	815	213	251	1144	1538	815	213	251	1159	1538	815
CHHM20 - 6255DB - (B) - Ratio	15	4	1508	815	261	324	1194	1613	815	261	324	1228	1613	815
CHHM25 - 6255DB - (B) - Ratio	18.5	4	1603	815	328	394	1270	1768	815	328	394	1321	1768	815
CHHM30 - 6255DB - (B) - Ratio	22	4	1603	815	328	394	1270	1768	815	328	394	1321	1768	815
CHHM40 - 6255DB - (B) - Ratio	30	4	1603	815	328	394	1285	1768	815	328	394	1328	1768	815
CHHM50 - 6255DB - (B) - Ratio	37	4	1718	815	328	394	1323	1928	815	328	394	1420	1928	815
CHHM60 - 6255DB - (B) - Ratio	45	4	1718	815	328	394	1323	1928	815	328	394	1420	1928	815
CHHM8 - 6265DA - (B) - Ratio	5.5	4	1480	874	168	212	1366	1552	874	168	212	1376	1552	874
CHHM10 - 6265DA - (B) - Ratio	7.5	4	1493	874	213	251	1381	1588	874	213	251	1401	1588	874
CHHM15 - 6265DA - (B) - Ratio	11	4	1553	874	213	251	1396	1648	874	213	251	1411	1648	874
CHHM20 - 6265DA - (B) - Ratio	15	4	1618	874	261	324	1446	1723	874	261	324	1482	1723	874
CHHM25 - 6265DA - (B) - Ratio	18.5	4	1713	874	328	394	1525	1878	874	328	394	1570	1878	874
CHHM30 - 6265DA - (B) - Ratio	22	4	1713	874	328	394	1525	1878	874	328	394	1570	1878	874
CHHM40 - 6265DA - (B) - Ratio	30	4	1713	874	328	394	1540	1878	874	328	394	1583	1878	874
CHHM50 - 6265DA - (B) - Ratio	37	4	1828	874	328	394	1575	2043	874	328	394	1672	2043	874
CHHM60 - 6265DA - (B) - Ratio	45	4	1828	874	328	394	1575	2043	874	328	394	1672	2043	874
CHHM10 - 6275DA - (B) - Ratio	7.5	4	1754	1161	213	251	2516	1849	1161	213	251	2536	1849	1161
CHHM15 - 6275DA - (B) - Ratio	11	4	1814	1161	213	251	2531	1909	1161	213	251	2546	1909	1161
CHHM20 - 6275DA - (B) - Ratio	15	4	1879	1161	261	324	2581	1984	1161	261	324	2617	1984	1161
CHHM25 - 6275DA - (B) - Ratio	18.5	4	1974	1161	328	394	2660	2139	1161	328	394	2705	2139	1161
CHHM30 - 6275DA - (B) - Ratio	22	4	1974	1161	328	394	2660	2139	1161	328	394	2705	2139	1161
CHHM40 - 6275DA - (B) - Ratio	30	4	1974	1161	328	394	2670	2139	1161	328	394	2718	2139	1161
CHHM50 - 6275DA - (B) - Ratio	37	4	2089	1161	328	394	2715	2304	1161	328	394	2810	2304	1161
CHHM60 - 6275DA - (B) - Ratio	45	4	2089	1161	328	394	2715	2304	1161	328	394	2810	2304	1161

Note: 4. "B" after the frame size indicates models equipped with brake.

5. Dimension of shaft end: Refer to pages F-28 to F-29 for details.

6. Dimensions in above drawings are subject to change without notice.