

RRH-Series



RRH-606





RRH-1006




Handle Type :
Removable strap handles


HI-POWER PRO SET

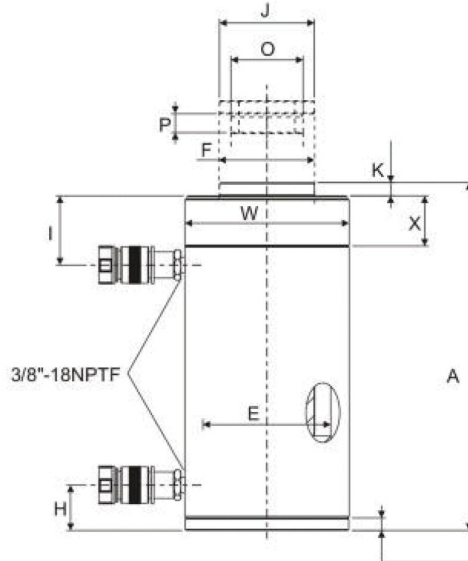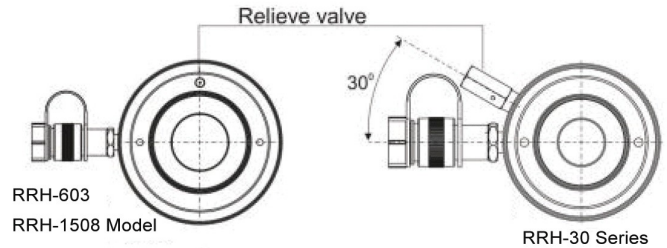

Steel baseplate :
12ton serial : 8mm
20~30ton serial : 10mm
60ton serial : 12mm
100ton serial : 16mm

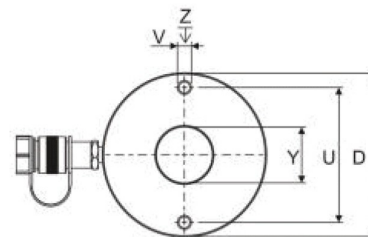

This drawing show the base mounting holes of barrel before setting steel base plate.



Option Heat Treated Hollow Saddles

Cylinder Model/Cap. ton (kN)	Model No.	Saddle Dimensions		
		A (mm)	B (in)	C (mm)
RRH-307,3010	XRRH-30	63	1-1/4"-7	9
RRH-603, 606, 6010	XRRH-60	91	1-5/8"-5-1/2	12
RRH-1001, 1003, 1006, 10010	XRRH-100	126	2-1/2"-8	13

* Smooth hollow saddles are standard on all RRH series.

Model No.	Outer Dimension						Threads Dimension					Base Mounting Holes			Weight (kg)
	Cyl. Bore Diam.	Plngr. Diam.	Cyl. Base to Adv. Port	Cyl. Top to Return Port	Saddle Diam.	Saddle Protr. Fr. Plngr.	Plunger Internal Thread	Plunger Thread Length	Collar Thread	Collar Thread Length	Center Hole Diam.	Bolt Circle	Thread	Thread Depth	
	E (mm)	F (mm)	H (mm)	I (mm)	J (mm)	K (mm)	O (mm)	P (mm)	W (in)	X (mm)	Y (mm)	U (mm)	V (in)	Z (mm)	
RRH-307	88.9	63.5	25	60	93	9	1 ¹³ / ₁₆ "-16	22	4 1/2"-12	42	33.3	92.2	3/8"-16	15.7	21.65
RRH-3010	88.9	63.5	25	60	93	9	1 ¹³ / ₁₆ "-16	22	4 1/2"-12	42	33.3	92.2	3/8"-16	15.7	27.65
RRH-603	123.9	92.2	31	66	91	12	2 3/4"-16	19	6 1/4"-12	48	54.1	130.0	1/2"-13	14.0	29.60
RRH-606	123.9	92.2	31	66	91	12	2 3/4"-16	19	6 1/4"-12	48	54.1	130.0	1/2"-13	14.0	36.60
RRH-6010	123.9	92.2	31	66	91	12	2 3/4"-16	19	6 1/4"-12	48	54.1	130.0	1/2"-13	14.0	46.60
RRH-1001	165.1	127.0	38	44	126	12	4"-16	25	-	-	79.5	177.8	5/8"-11	19.0	36.60
RRH-1003	165.1	127.0	38	85	126	12	4"-16	25	8 3/8"-12	60	79.5	177.8	5/8"-11	19.0	64.60
RRH-1006	165.1	127.0	38	85	126	12	4"-16	25	8 3/8"-12	60	79.5	177.8	5/8"-11	19.0	82.60
RRH-10010	165.1	127.0	38	85	126	12	4"-16	25	8 3/8"-12	60	79.5	177.8	5/8"-11	19.0	109.60
RRH-1508	190.5	152.4	38	60	127	4	4 1/4"-12	25	-	-	79.5	214.0	5/8"-11	15.0	116.00